


# 1080P WiFi 4G HD Network Portable PTZ Vehicle Camera



## Features:

- 1/2.8 " progressive scan SONY CMOS
- Built-in 4G/WiFi module Support WiFi hot spot
- Built-in 8000mAH lithium battery, Endurance time up to 8 hour(Infrared light is off)
- Support Motion detection alarm,4 adjustable motion detection zones.
- Aluminum PTZ case with high strength;
- Powerful aux IR system, range up to 30 meters;
- IP index up to IP66, weather proof;
- With handle design, more portable.
- New design of drive system, PTZ positioning precision up to +/-0.05° ;
- Image flip for stand / ceiling mount;
- Day/night (ICR),12~24V voltage input.

## Dimensional drawing:

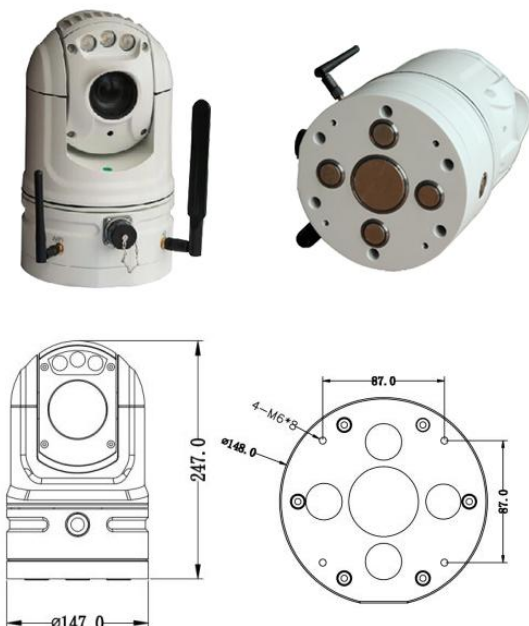

Model:SVN-20HBP971GW	
WiFi	
protocol standards	IEEE 802.11b /IEEE 802.11g/IEEE 802.11n
antenna	3dBi omni -directional antenna
rate	150Mbps
frequency	2.4GHz
WiFi hot spot	support
bandwidth	20/40MHz optional
security	64/128BIT WEP encryption; WPA-PSK/WPA2-PSK, WPA-PSK, WPA2-PSK
4G	
Band	LTE-TDD/LTE-FDD/TD-SCDMA/EVDO/EDEG/GPRS/GSM/CDMA
Battery(lithium battery)	
Battery capacity	11.1V 8000mAH
Endurance time	8 hour(Infrared light is off)
Camera	
Image Sensor	1/2.8 " progressive scan SONY CMOS,
Lens	4.7~94mm, 20x optical zoom
Focus mode	Auto
Iris	Auto/Manual; F1.4 ~ F3.5
Shutter	Auto/Manual; shutter time: 1/3 s ~ 1/30, 000 s
Min.Illumination	Color: 0.05lux @(F1.4) B/W: 0.01lux @(F1.4)
Day/Night	IR-cut filter with auto switch (ICR)
Video	
Max. Resolution	1920 (H) x1080(V)
Video Compression	H.264 main Profile/MJPEG
Frame Rate	1080P (1920*1080) 30 fps; 720P (1280*720) 30 fps; D1 (720*576) 25 fps
Network	
Protocols	IPv4/IPv6; HTTP; Qos; FTP; SMTP; UPnP; SNMP; DNS; DDNS; NTP; RTSP; RTP; TCP; UDP; ICMP; DHCP; PPPoE; onvif
Compatible Integration	ONVIF, SONY VISCA
Pan&Tilt	
Pan Range	360°endless
Pan Speed	0.05°~80°
Tilt Range	-30°~40° (-20°~90°)
Tilt Speed	0.05°~60°
Number of Preset	255
Patrol	6 patrols, up to 18 presets per patrol
Pattern	4, with the total recording time not less than 10 minutes
Power loss recovery	Support
Infrared	
IR Distance	30m
IR Angle	Adjustable by zoom
General	
Power Supply	DC 12-24V
Power consumption	20 W
Work.Environment	-20 °C~65°