


4K HD Broadcast Camera

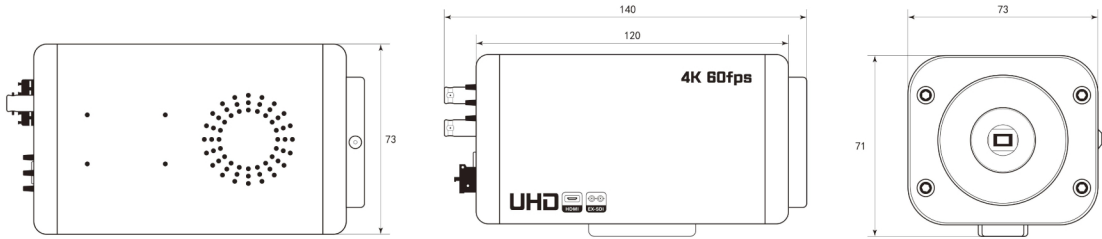

Model.	SVN-3304K60F
Sensor	1/1.8" CMOS Sensor
Total Pixel (MP)	3840 (H)x 2160 (V) = 8.29M Pixels
Effective Pixel (MP)	3840 (H)x 2160 (V) = 8.29M Pixels
SDI Output Resolution	1080p@50/60fps,2160p@30/25fps,2160p@60/50fps
HDMI Output Resolution	1080p@50/60fps,2160p@30/25fps,2160p@60/50fps
Output Format	(1080p Support HD/EX-SDI), (2160P Support EX-SDI)
Lens	C-CS Auto Iris
Menu	Support Keys Function Menu
485/UART	Default 485
Minimum Illumination (LUX)	Color 0.59 lux/ B&W 0.33lux
IRIS	Auto/Fixed
DEGE DET	ON/OFF
Exposure	Brightness/Electronic Shutter/Sens-up/ AGC threshold adjustment
Day&Night	Auto(ICR)/Color/B&W/External
Color	AWB mode/Color Concentration adjustment
3D-DNR	OFF/Low/Middle/High
Image	Sharpness/Gamma/Flip/Mirror/Digital Zoom/ACE/DEFOG/Privacy Mask
System	Communication Protocol/Output Frame Rate/Video Range/Color Format/ Audio Format/Color Bar Signal/Camera ID/Reset/Language
Language	Chinese(Simplified&Traditional)/English/Japanese/Korean
Power Supply (V)	DC 12V+ 10%
Work Current (mA)	620mA
Work Temperature (°C)	-20°C~ +80°C /0% ~ 90% RH
Size (mm)	73(W) x 71(H) x 140(L) mm
Installation	Positive/Reverse/ (1/4" Screw holes)
Weight (g)	0.42Kg